
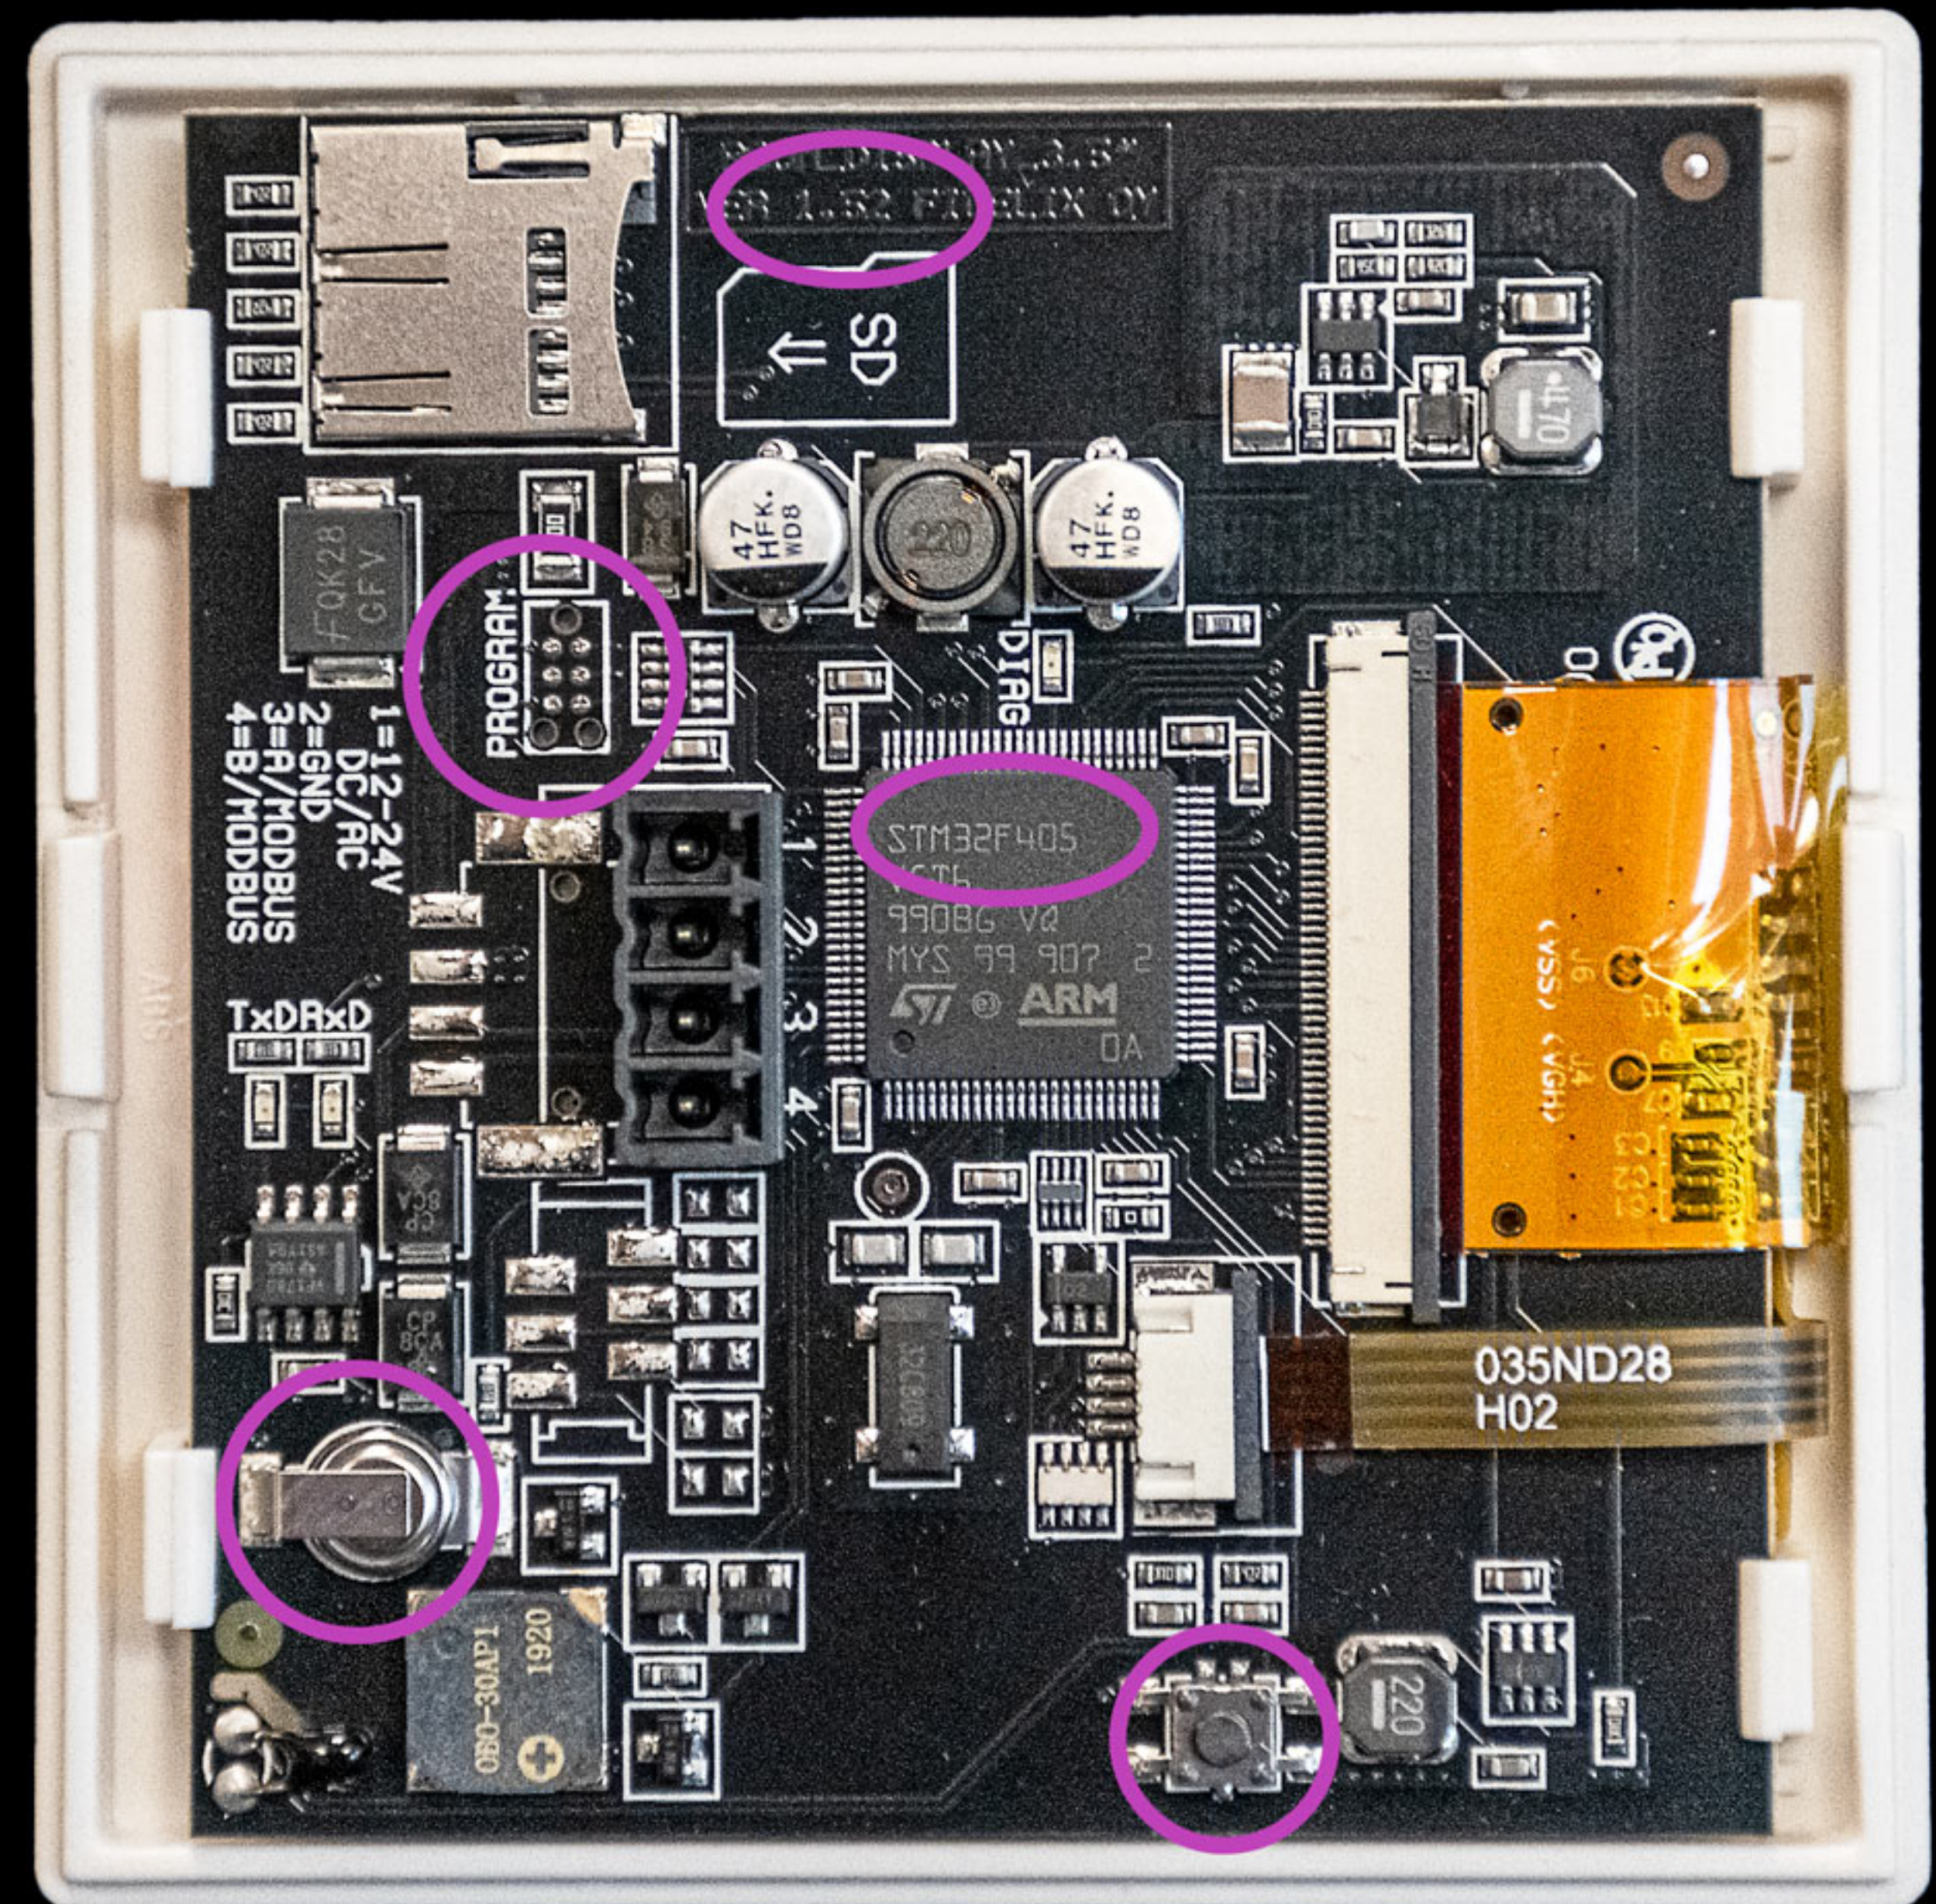


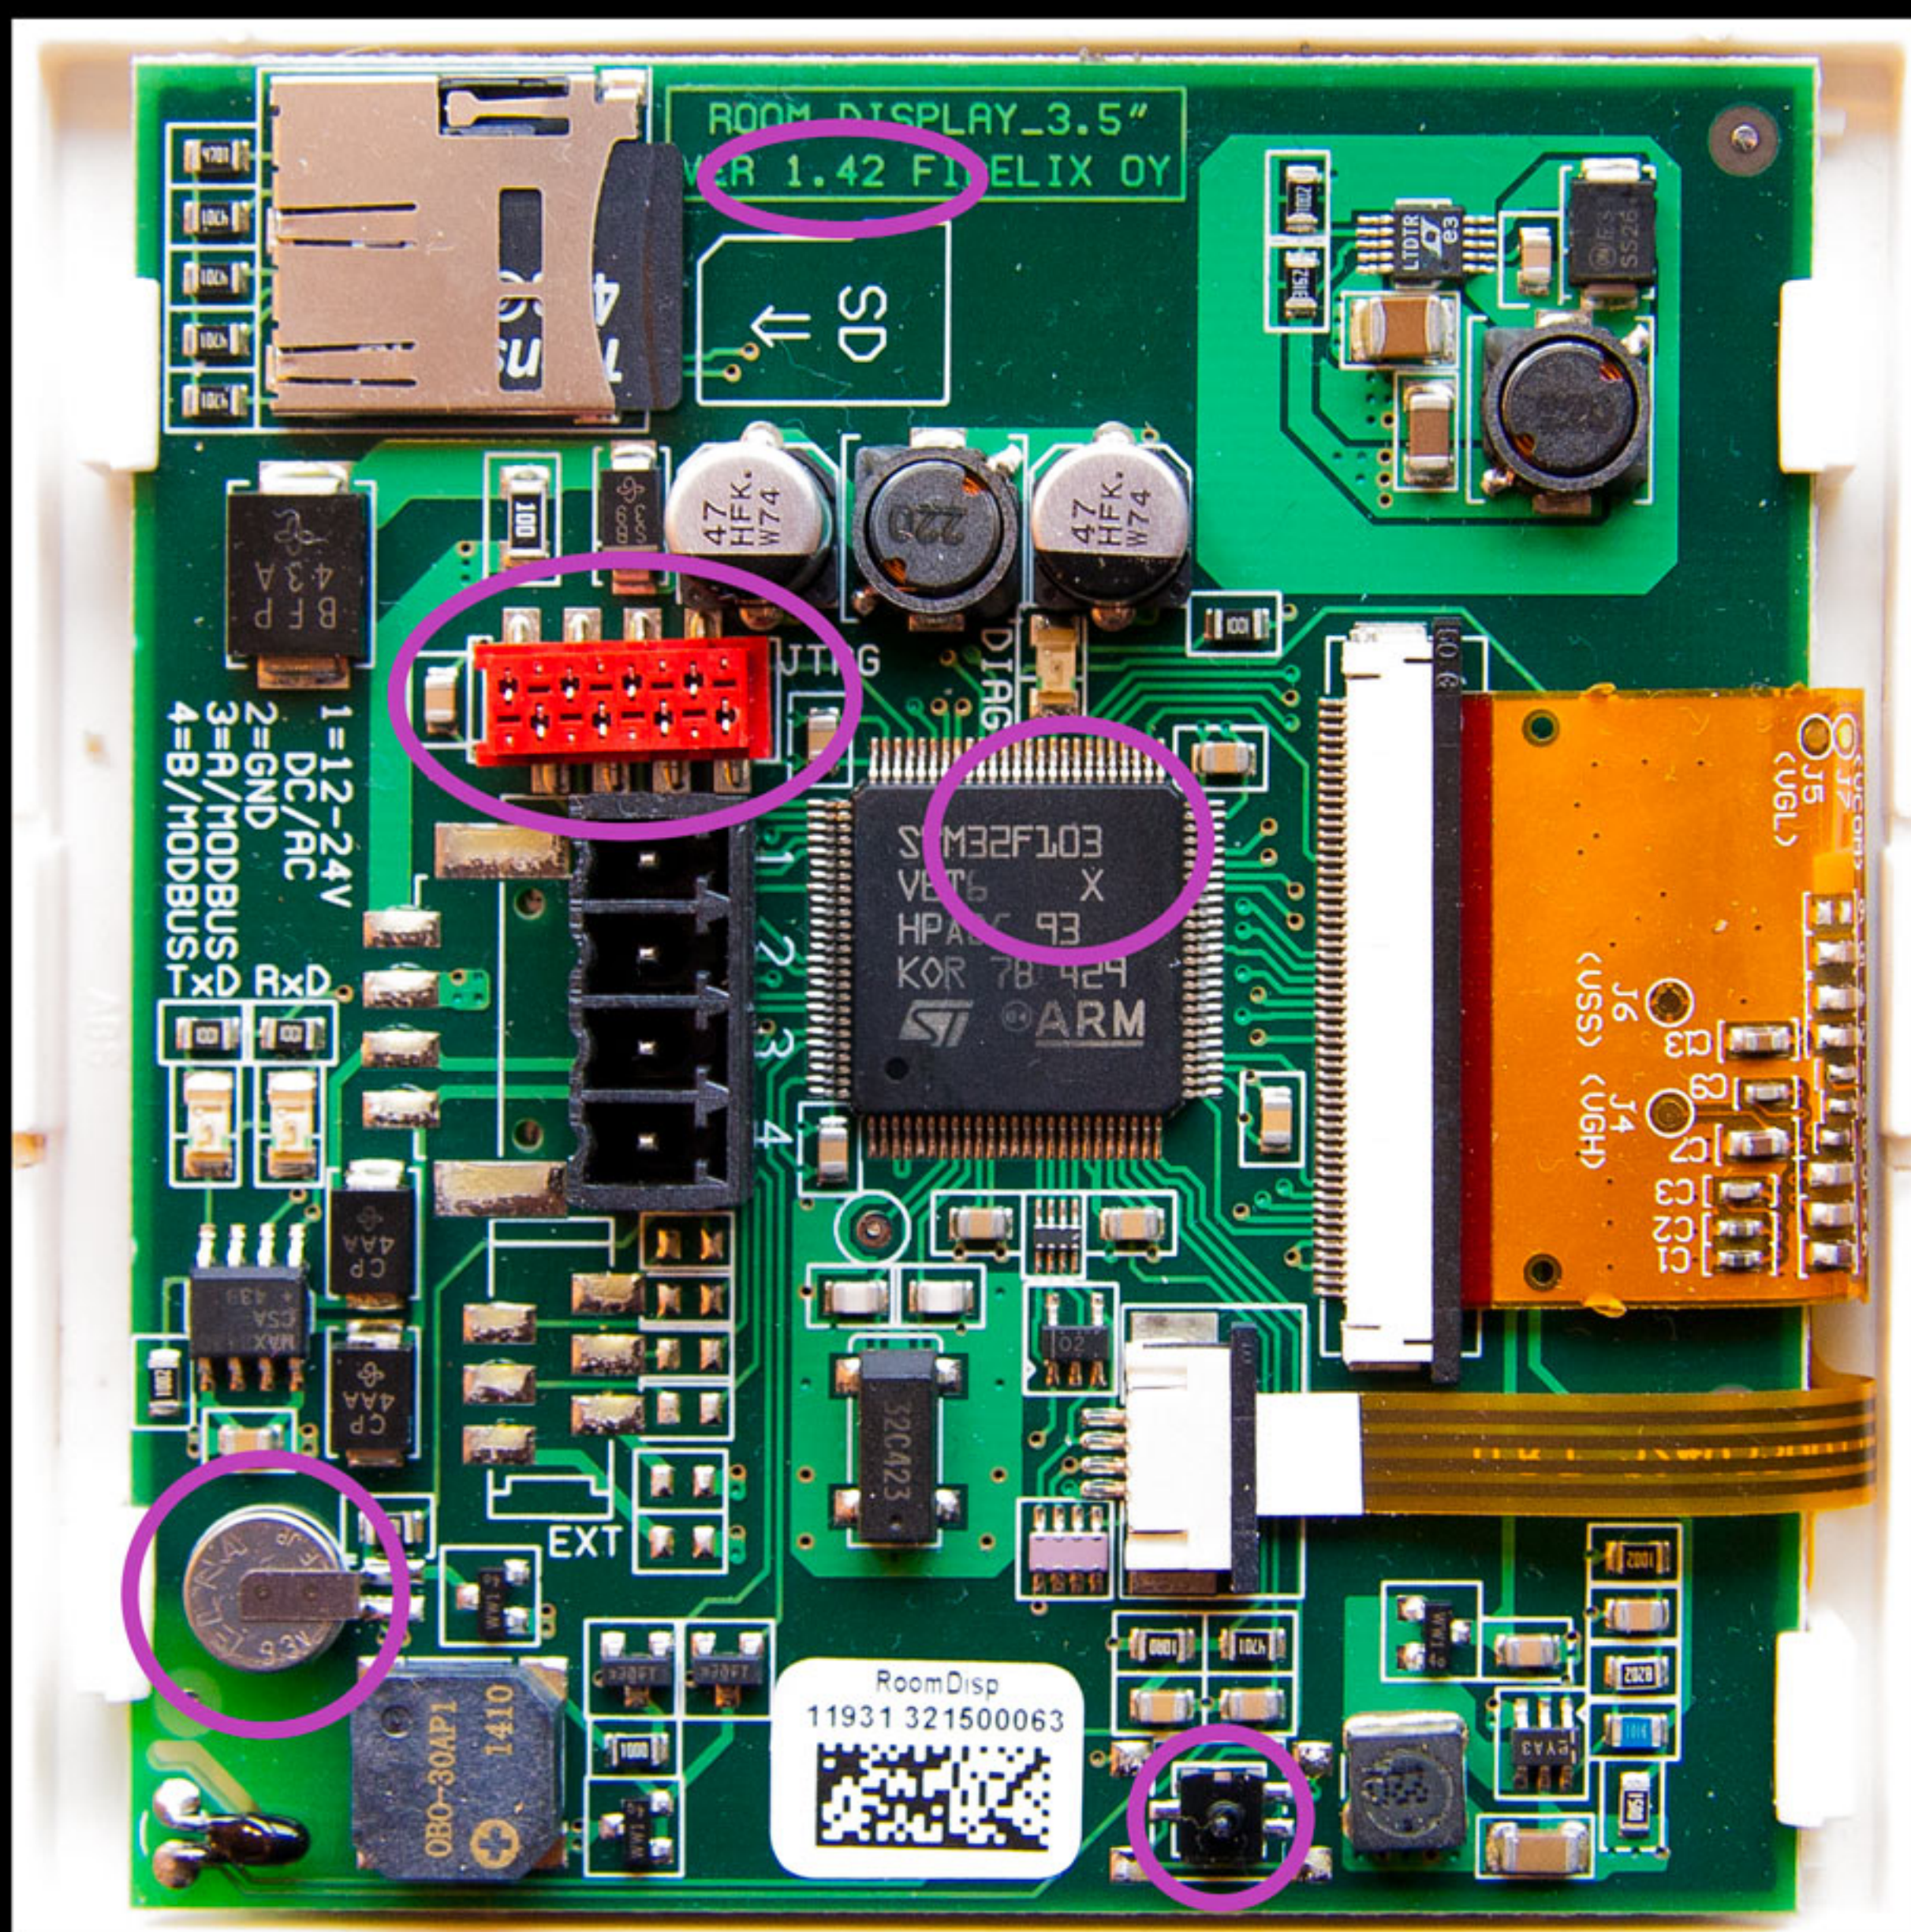

multiDISPLAY 1st generation

- PCB < VER 1.52
 - processor = STM32F103
 - power supply: 12-26 VDC / 16-26 VAC
- ==> firmware 0.28..2.7x

multiDISPLAY 2nd generation

- PCB >= VER 1.52
- processor = STM32F405
- power supply: 12-45 VDC / 16-32 VAC
- firmware 2.85..3.xx

Changed components

- different capacitor and holder
- different programming connector for production
- different tamper switch